


## 15" 2-Way Surround Speaker



Can be also used as compact front system (rotatable HF horn)





- ▶ 45 - 20.000 Hz frequency range
- ▶ High sensitivity (99 dB 1W/1m)
- ▶ High power capability: 500 W RMS
- ▶ Compact design
- ▶ 90° x 60° nominal coverage (HxV)
- ▶ Rotatable horn 90° x 60° / 60° x 90°
- ▶ Fullrange passive operation
- ▶ EASY MOUNT installation kit included
- ▶ Can be also used as compact front system

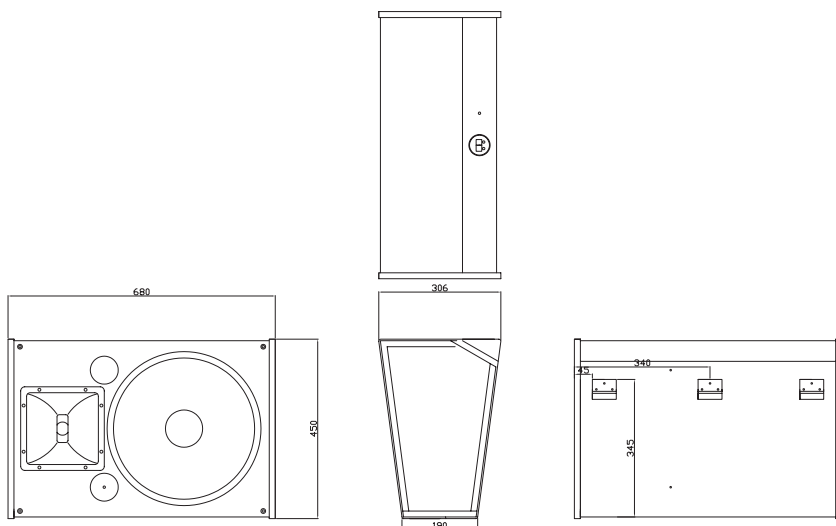

The CP 15 cinema surround speaker offers high power handling, sensitivity, performance and extended dynamic range required by digital sound formats. The cabinet is equipped with a 1.35" HF voice coil compression driver on a HF horn which offers a signal dispersion of 90° x 60° (H x V). The strong 15" MF/LF driver delivers smooth, extended bass response. The 500 watts continuous power rating (1.400 watts peak) provides large dynamic range required for digital soundtracks with high reliability. The enclosure is painted with black textured lacquer and equipped with a black front grille. The CP 15 fits in any decor. NOVA's durable EASY MOUNT installation kit enables the quick and safe installation by one person only.

|   |  |
|---|--|
| Article number:                             | # 00306  |
| System Type:                                | 15" configuration  |
| Frequency Range:                            | 45 Hz - 20 kHz   |
| Coverage Pattern:                           | 90° x 60° nominal  |
| Crossover Modes:                            | Passive  |
| Crossover Frequency:                        | 1.6 kHz  |
| Power Rating (Continuous / Program / Peak): | Passive: 500 W / 700 W / 1.400 W<br>Active LF: n/a (passive)<br>Active HF: n/a (passive) |
| System Sensitivity (1w/1m):                 | 99 dB SPL (128 dB max. SPL)  |
| LF Driver:                                  | 1 x NOVA 15/500  |
| LF Nominal Impedance:                       | 8 ohms   |
| HF Driver:                                  | 1 x NOVA HT400, 1.35 in. voice coil compression driver                                   |
| HF Nominal Impedance:                       | 8 ohms   |
| Active Tunings:                             | n/a (passive)  |
| Enclosure:                                  | NOVA ProWo© MDF, 15 mm   |
| Suspension / Mounting:                      | EASY MOUNT installation kit included   |
| Finish:                                     | Black textured lacquer finish  |
| Grille:                                     | Acoustic transparent charcoal mesh cover   |
| Dimensions (W x H x D):                     | 680 mm x 450 mm x 306 mm   |
| Net Weight:                                 | 18 kg  |
| Optional Accessories:                       | n/a  |

IEC filtered noise with 6 dB crest factor. / Calculated based on power rating and sensitivity.  
CRAFT AUDIO GmbH continually engages in research related to product improvement. Materials, design and sound tuning are introduced on existing products. Any current product of CRAFT AUDIO GmbH may differ in some respect from its published description. CRAFT AUDIO GmbH will always equal or exceed to original design unless otherwise noted. Limited liability on contents. Subjects to change without prior notice.

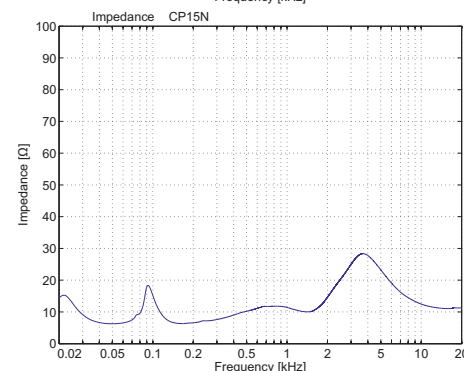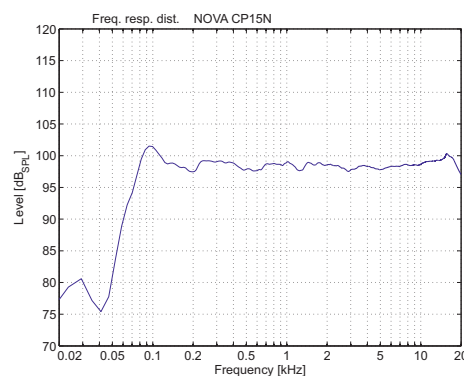

All measurements have been generated with FOUR AUDIO - WINMF / ROBO3 frontend.  
All measurements under free field conditions.

