


Hornloaded 6 x 5"/3 x 1" + 2 x 15" Line-Array Front-System

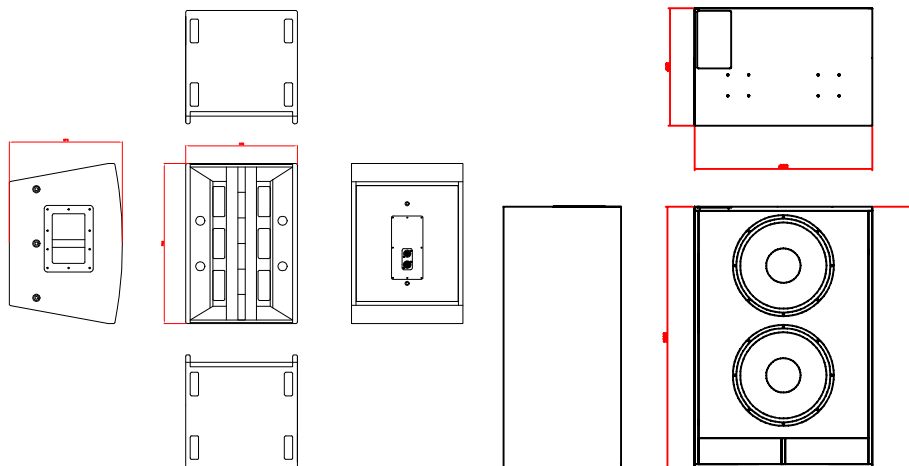

NCS215B

CMAX5 Line Array

- ▶ 800 W / 1600 W power handling
- ▶ 100° x 22° dispersion
- ▶ Vertical array design
- ▶ 104 dB @ 1W/1M

NCS 215B Subwoofer


- ▶ 1.200 W / 2.400 W power handling
- ▶ 2 x 15" high power loudspeaker
- ▶ 4" voice coil
- ▶ Very low power compression
- ▶ Integrated voice coil cooling system
- ▶ TML cabinet design
- ▶ Deep and clear bass reproduction

CMAX5 Line Array

The CMAX5 is a two-way high performance screen channel loudspeaker system. The cabinet is equipped with three 1" HF drivers (1.75" voice coil), which are mounted onto an vertical array horn design. The CMAX5 has a coverage of 100° x 22° (H x V). The MF/LF frequency range is covered by six 5" speaker which are mounted in a hornloaded, vented cabinet to ensure very clear and dynamic low / mid reproduction. The system can be driven in passive mode. Therefore a passive crossover is installed. The cabinet is constructed by 15mm wood, covered with Black NOVA PolyCoat© finish and equipped with six M8 screws which ensures the safe and stable connection to the optional accessories. Open end sockets are mounted on the back of the cabinet for signal input and link output. The power rating of the CMAX5 line array cabinet is 800 W at 6 Ohms.

NCS 215B Subwoofer

The NCS 215 B is a high performance screen channel bass system. The Sub frequency range is covered by two 600 Watts 15" speakers which are mounted in a perfect tuned TML design to ensure clear and deep bass reproduction. The system can be driven in active mode. The recommended crossover frequency is between 80 and 120 Hz. The cabinet is constructed by 15mm wood, covered with Black NOVA PolyCoat© finish and equipped with several M6 and M8 screws which ensures the safe and stable connection to the optional accessories. Four open end sockets are mounted on the top of the cabinet for signal input and signal link output. The power rating of the NCS 215 B is 1.200W at 4 Ohms.

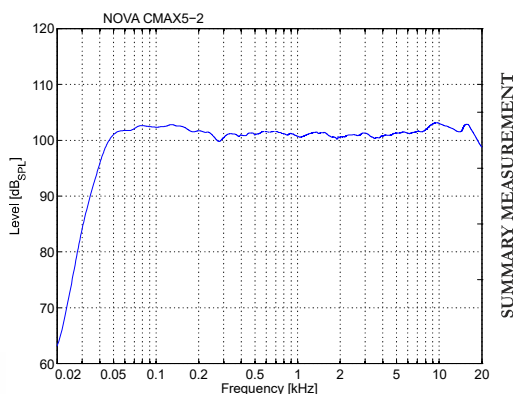

All measurements have been generated with FOUR AUDIO - WINMF / ROBO3 frontend. All measurements under free field conditions.



Hornloaded 6 x 5''/3 x 1'' + 2 x 15'' Line-Array Front-System

CMAX5 Line Array

Article number:	# 26132
System Type:	6 x 5" configuration
Frequency Range:	100 Hz - 20 kHz
Coverage Pattern:	100° x 22° nominal
Crossover Modes:	Passive
Crossover Frequency:	1.2 kHz
Power Rating (Continuous / Program):	Passive: 800 W / 1600 W Active LF: n/a Active HF: n/a
Sensitivity (1w/1m) / SPLmax:	104 dB SPL / 136dB
LF Driver:	6 x NOVA 5/150EL-8
LF Nominal Impedance:	6 ohms
HF Driver:	3 x NOVA TPM4-1750, 1.75 in. voice coil compression driver
HF Nominal Impedance:	6 ohms
Active Tunings:	n/a
Enclosure:	NOVA ProWo© MDF, 16 mm
Suspension / Mounting:	n/a
Finish:	Black NOVA PolyCoat© finish
Grille:	Black powder coated perforated steel
Dimensions (W x H x D):	370 mm x 530 mm x 375 mm
Net Weight:	27 kg (each)
Optional Accessories:	MB5 U-bracket, MC5 Flyframe, MCON connector set

IEC filtered noise with 6 dB crest factor. / Calculated based on power rating and sensitivity.
CRAAFT AUDIO GmbH continually engages in research related to product improvement. Materials, design and sound tuning are introduced on existing products. Any current product of CRAAFT AUDIO GmbH may differ in some respect from its published description. CRAAFT AUDIO GmbH will always equal or exceed to original design unless otherwise noted. Limited liability on contents. Subjects to change without prior notice.

NCS 215B Subwoofer

Article number:	
System Type:	2x15" configuration
Frequency Range:	38 Hz - 1.2 kHz
Coverage Pattern:	n/a
Crossover Modes:	External Signal Processing
Crossover Frequency:	70 - 200 Hz (recommended)
Power Rating (Continuous / Program):	Passive: 1.200 W / 2.400 W Active LF: n/a Active HF: n/a
Sensitivity (1w/1m) / SPLmax:	103 dB SPL / 137 dB
LF Driver:	2 x NOVA 15/600C
LF Nominal Impedance:	4 ohms
HF Driver:	n/a
HF Nominal Impedance:	n/a
Active Tunings:	70 - 200 Hz (recommended)
Enclosure:	NOVA ProWo© MDF, 16 mm
Suspension / Mounting:	n/a
Finish:	Black NOVA PolyCoat© finish
Grille:	n/a
Dimensions (W x H x D):	680 mm x 1265 mm x 450 mm
Net Weight:	51 kg (each)
Optional Accessories:	# 00507: NCS-S Stacking Adapter

IEC filtered noise with 6 dB crest factor. / Calculated based on power rating and sensitivity.
CRAAFT AUDIO GmbH continually engages in research related to product improvement. Materials, design and sound tuning are introduced on existing products. Any current product of CRAAFT AUDIO GmbH may differ in some respect from its published description. CRAAFT AUDIO GmbH will always equal or exceed to original design unless otherwise noted. Limited liability on contents. Subjects to change without prior notice.